

Before Use Maintenance

While Whiz is Upright

- 1) Check [dust bag](#)
(replace, if needed)




- 2) Put in the [main battery](#)




- 3) Empty the [hopper tray](#)




- 4) Clean the [5 cliff sensors](#)
with the Air Duster

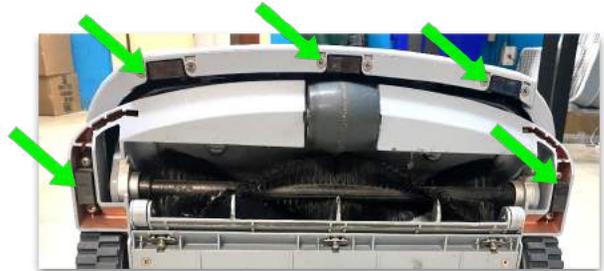

- 5) Check that [brush](#) is
clean (no hair) &
inserted correctly

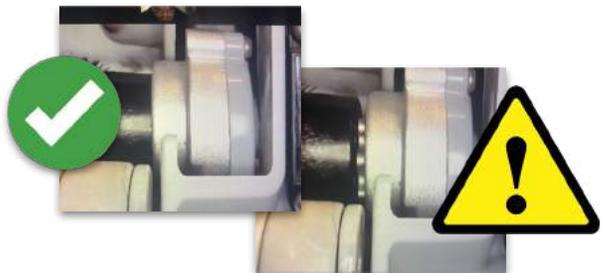

- 6) Turn on the [secondary battery](#)

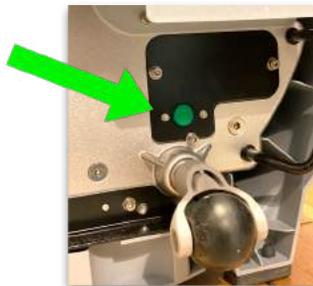

- 7) Turn on the [main power button](#)!



Mid-Day Maintenance

Between Routes

- 1) Empty the [hopper tray](#)
1-2x per day




- 2) Clean [sensors](#) with Air Duster, if dusty



- 3) Clean [brush](#) -
remove any hair



- 4) When below 30% charge, replace with a fully [charged battery](#)

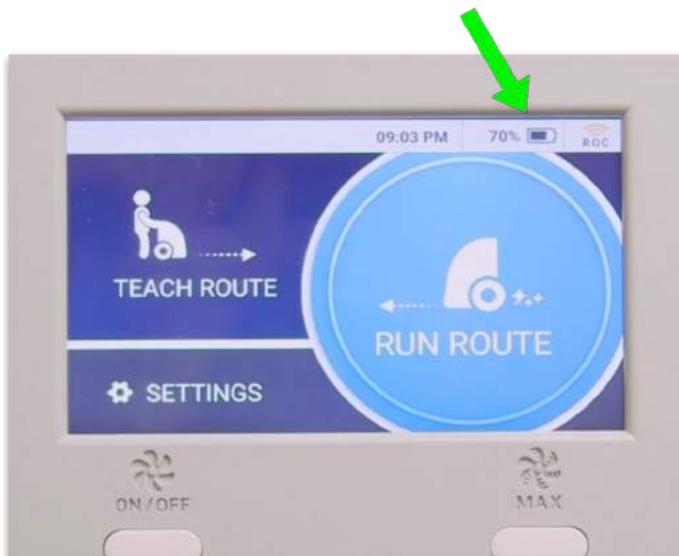

End of Day Maintenance

While Whiz is Upright

- 1) Check [dust bag](#) (replace, if needed)



- 2) Take the main battery out - place both [batteries in charger](#) overnight



- 3) Empty the [hopper tray](#)




- 4) Turn off the [main power button](#)



Tilt Whiz back on its back

- 5) Turn off the [secondary battery](#)

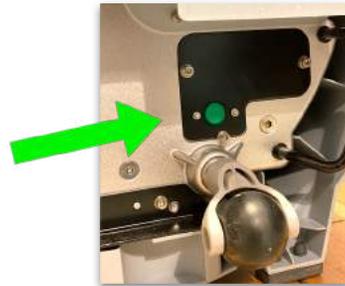

- 6) Remove the [brush](#) (cut/remove any hair or tangles) & check the [brush gears](#)




- 7) Clean the [5 cliff sensors](#) and [middle LiDar](#) (only if needed) with the Air Duster and microfiber cloth




Weekly & Monthly Maintenance

Check the Wheels

1) Tighten the [back caster wheels](#) with a **12mm wrench**

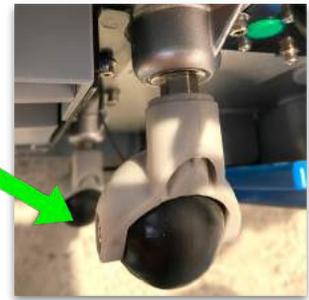


2) If needed, tighten the [front drive wheels](#) with a **3mm allen wrench**

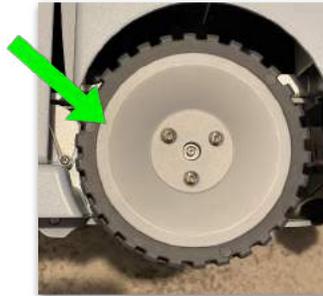


3) Check the 2 HEPA filters, replace them if they look dirty/blackened -- usually every 5 wks



4) Replace your [brush](#) -- recommended every 5 weeks, if you are running the robot 15 hours per week

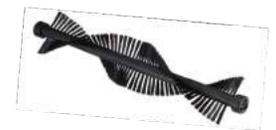


5) Clean the [vacuum motor filter](#) - use the Air Duster or rinse with water and let dry before use (or you can replace at no cost - check the [Store](#))

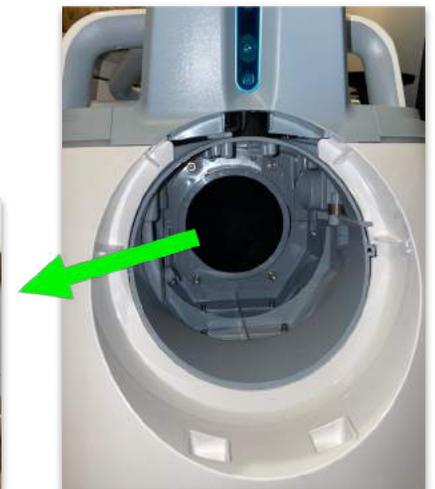

Weekly & Monthly Maintenance

Tightening Brush Gears

- 1) Check and Tighten brush gears if necessary, **2mm Allen Wrench or Hex Bit**

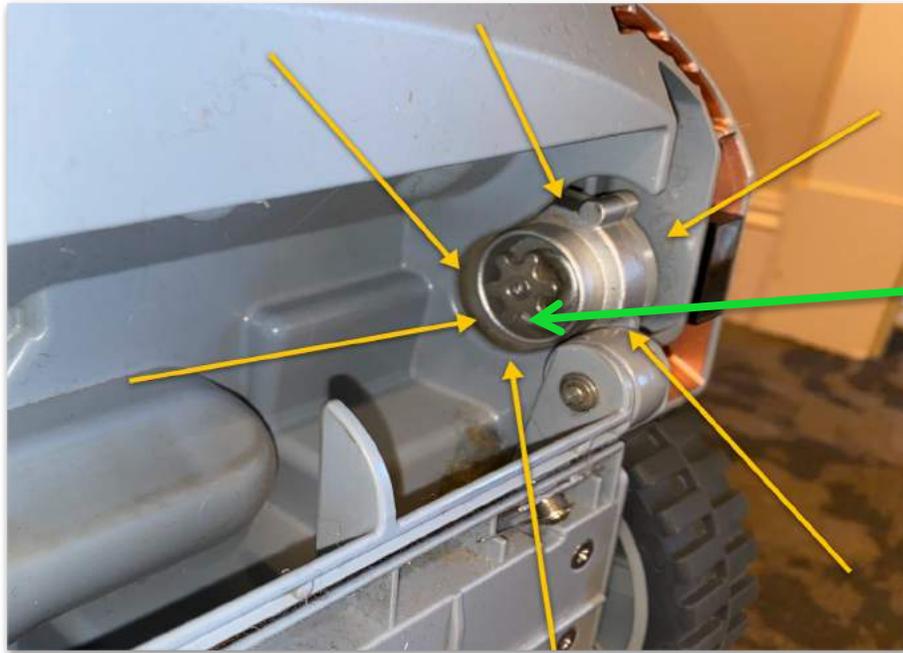

Cleaning Bottom of Unit

- 2) Clean the unit this way 1-2x per month
- 3) Make a mix with half water, half Simple Green in a spray bottle
- 4) Spray the solution on a microfiber cloth until it is damp (enough moisture to wipe down the bottom, remove any caked dirt)
- 5) Continue wiping with medium pressure on the entire bottom of the unit, until the dirt or dust is fully removed (should take 5-10 min)

